

User Exit


Use this basic rule to define a DLL containing user exits.

When a user exit has been defined, the viewer will then call the functions `NSWBefore` and `NSWAfter` for each received and sent screen. See the *User Exits* documentation for further information.

► To define the DLL containing the user exits

1. From the **Basic** menu, choose **User Exit**.

The User Exit dialog box appears. When a DLL has already been defined, the corresponding path is shown in this dialog box.

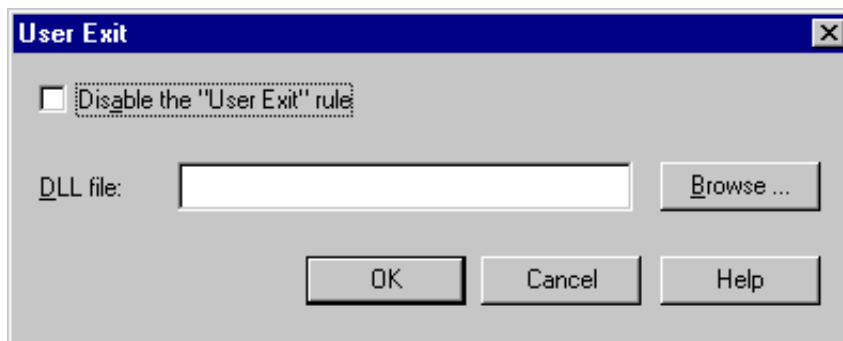

2. To define a DLL, specify the path to the DLL in the text box, or choose the **Browse** button to select the DLL from the Open dialog box..

Or:

If the defined DLL is no longer to be used, select the **Disable the User Exit rule** check box.

3. Choose the **OK** button.